www.kondator.se

Powerdot MICRO

935-PM30S
935-PM30G
935-PM30WM
935-PM30W
935-PM30M
935-PM30C
935-PM30BM
935-PM30

CONTENT:

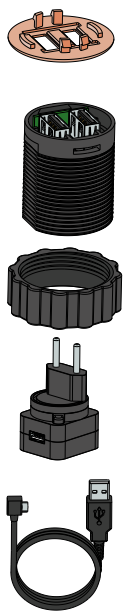

x1
x1
x1
x1
x1



- 2 **USB Charger 5V, 2.0A (Type-A)**
- 1450 mm **USB Micro (Type-C Female)** to **USB (Type-A Male)** cable
- **USB (Type-A Female)** to **Europlug** adapter



1 CLICK IT IN

Place the cover on top and make sure it is aligned with the USB ports. Once aligned, push them together until it clicks.

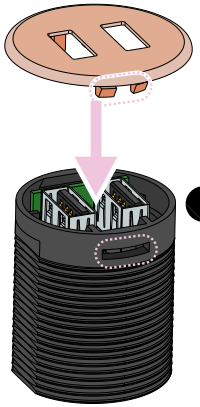

Ascertain that the by checking the side slots. If the hooks, are visible then it will not come off.

! Note that it is extremely difficult to remove the cover once attached without harming the product.

2 DRILL

Drill a hole in the table/furniture/etc.

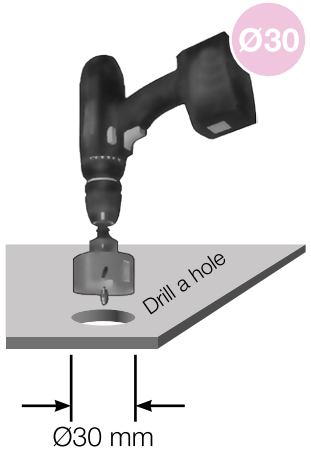

3 INSERT

Insert the Powerdot MICRO into the hole, then feed the power plug through the plastic fastening nut.

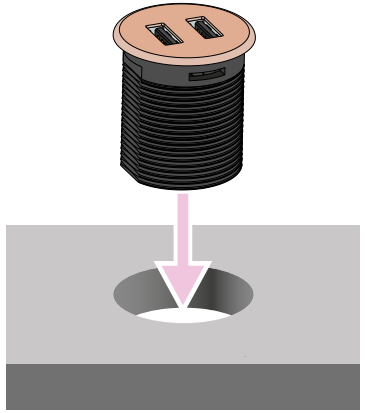

4 USE FASTENING NUT

Turn the fastening nut as far up the thread as possible by turning clockwise until the product is fully rigid to the table/furniture.

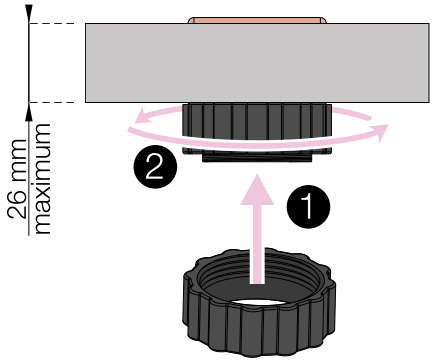

5 RE-ALIGN USB PORTS

Plug the USB cable to each port to align the USB ports. Repeat for both USB ports.

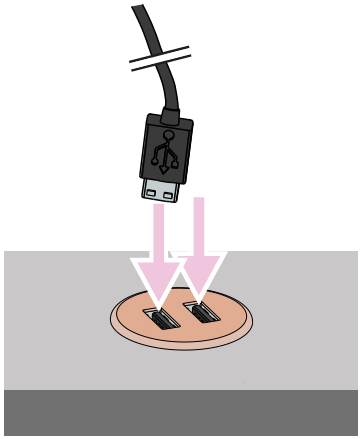

6 CONNECT AND PLUG IN

Connect USB Micro cable to the grommet and to adapter. Lastly, plug it to a wall socket or powerstrip of your choice.

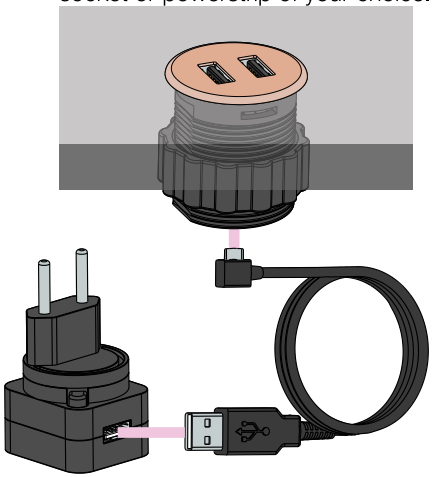

Revised 190702

Kondator AB, Energivägen 8 - Box 121, SE-135 23 TYRESÖ, SWEDEN